

**Profec Slangstos sexkantig
mässing 1 1/4" x 32 mm
invändig gänga x
slangkoppling 30bar (0411932)**



TEKNISKA SPECIFIKATIONER


| | |
|----------------|--------------------------------|
| Material | mässing |
| Anslutning | invändig gänga x slangkoppling |
| Tryck | 30 bar |
| Max temp. | 120 °C |
| Storlek | 1 1/4" x 32 mm |
| Max temperatur | 120 °C |
| Skruvnyckel | 46 |

DIMENSIONER

| | |
|-------|---------|
| Dq-2 | 29.5 mm |
| F-1 | 12 mm |
| L | 48.5 mm |
| Lb | 49 mm |
| Lq-2 | 20 mm |
| Nq-2 | 4 |
| P-1 | 20 mm |
| ØDi-1 | 1 1/4 " |

ØDi-2 29.5 mm

ØDo-2 32 mm

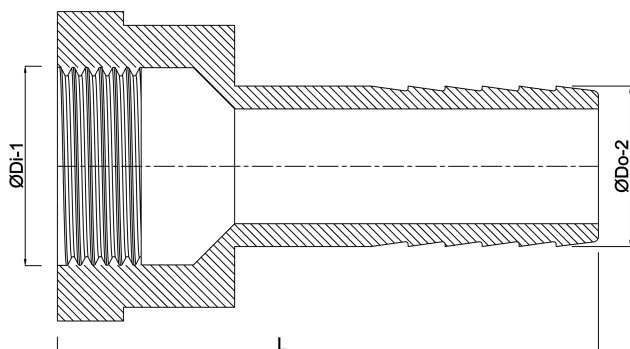

Genererad den: 28/05/2026

Bevo Nordic A/S
Pakhusgården 54
5000 Odense C
Danmark
+45 66 19 25 45
info@bevo.dk
<http://www.bevo.com>