

Profec Kulventil PVC-U 32 mm limsocket 16bar 24- 240VAC/VDC grå type Safe med don J4C S20 (7018920)



TEKNISKA SPECIFIKATIONER

| | |
|-----------------------|----------------------|
| Färg | grå |
| Typ | Safe med don J4C S20 |
| Material | PVC-U |
| Funktion | ställdon |
| Hus konstruktion | 3-delt |
| Konvertertid | 15 sek. |
| Materialhus | PVC-U |
| Packningsmaterial | hytrel/EPDM |
| Anslutning | limsocket |
| Volt | 24-240VAC/VDC |
| Max temperatur | 60 °C |
| Max omgivsetemperatur | -10 - +60 °C |
| Tryck | 16 bar |
| Storlek | 32 mm |

DIMENSIONER


| | |
|------|----------|
| Ct-1 | 230.5 mm |
|------|----------|

Lb 126 mm

ØDf 25 mm

ØDi-1 32 mm

ØDi-2 32 mm

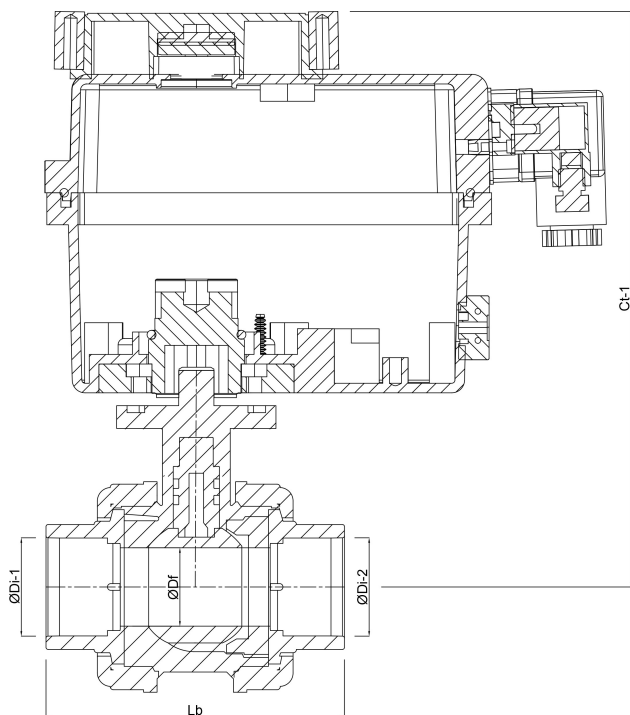

PRODUKTINFORMATION

Anslutning enligt DIN 43650

Genererad den: 25/05/2026

Bevo Nordic A/S
Pakhusgården 54
5000 Odense C

Danmark
+45 66 19 25 45
info@bevo.dk
<http://www.bevo.com>