



# TEKNISKA SPECIFIKATIONER

|   |                                 |
|---|---------------------------------|
| Färg                                      | grön                            |
| Material                                  | gjutjärn                        |
| Pump body                                 | gjutjärn                        |
| Material impeller 1                       | teknopolymer A                  |
| Modell                                    | själv sugande med tryckkontroll |
| Anslutning                                | invändig gänga                  |
| Volt                                      | 230VAC                          |
| Max temperatur                            | 35 °C                           |
| Minste mellantemperatur<br>(kontinuerlig) | 0 °C                            |
| Tryck                                     | 1 "                             |
| Max omgivningstemperatur                  | 40 °C                           |
| Sug                                       | 1 "                             |
| Typ                                       | JET 82 Control D                |
| MWC                                       | 47 m                            |
| Storlek                                   | 1"                              |
| Effekt                                    | 0.6 kW                          |

|               |                       |
|---------------|-----------------------|
| Ampere        | 3,8 A                 |
| Max flow rate | 3.6 m <sup>3</sup> /h |
| BEP Capacity  | 2.4                   |
| BEP Head      | 27.6                  |
| PORlh         | 29.8                  |
| PORhh         | 21.7                  |
| PORlq         | 1.7                   |
| PORhq         | 2.9                   |

## DIMENSIONER



|      |        |
|------|--------|
| Cb-1 | 144 mm |
| Cl-1 | 108 mm |
| G    | 111 mm |
| H    | 193 mm |
| H    | 193 mm |
| L    | 395 mm |
| L    | 395 mm |
| Mr   | 192 mm |
| O    | 9 mm   |

W 178 mm

W-1 178 mm

ØDi-1 1 "

ØDi-2 1 "

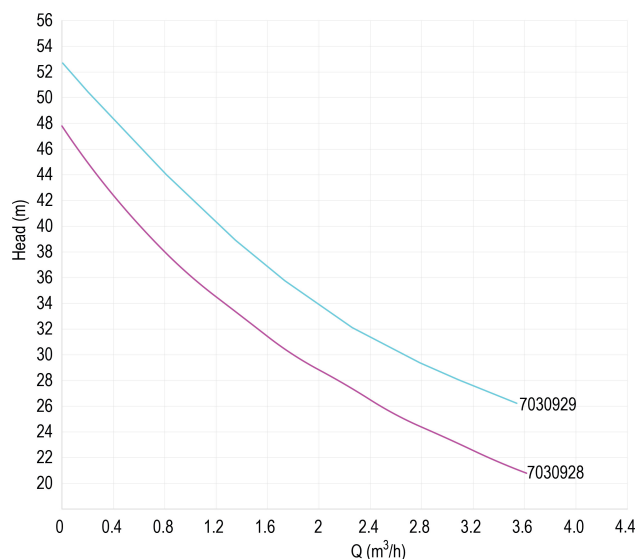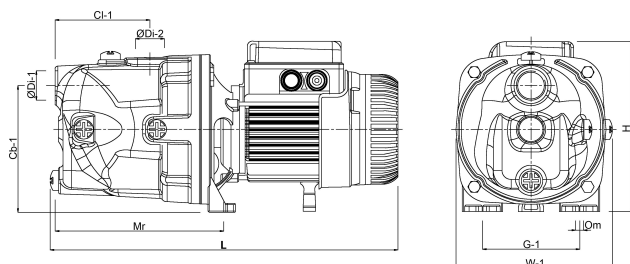

## PRODUKTINFORMATION

Installation: Horizontal, Fixed. Operating range: from 0.4 to 3.6 m<sup>3</sup>/h with head up to 53 metres. Suitable for pumping water with low levels of sand impurities. Self priming centrifugal pumps with excellent suction capacity even when air bubbles are present.

**Genererad den: 26/05/2026**

Bevo Nordic A/S  
Pakhusgården 54  
5000 Odense C

Danmark  
+45 66 19 25 45  
[info@bevo.dk](mailto:info@bevo.dk)  
<http://www.bevo.com>