



# TEKNISKA SPECIFIKATIONER

Färg grön

Material gjutjärn

Pump body gjutjärn

Material impeller 1 teknopolymer A

Modell självsugande med tryckkontroll

Anslutning invändig gänga

Volt 230VAC

Max temperatur 35 °C

Minste mellantemperatur  
(kontinuerlig) 0 °C

Tryck 1 "

Max omgivningstemperatur 40 °C

Sug 1 "

Typ JET 82 Control D

MWC 47 m

Storlek 1"

Effekt 0.6 kW

Ampere	3,8 A
Max flow rate	3.6 m <sup>3</sup> /h
BEP Capacity	2.4
BEP Head	27.6
PORlh	29.8
PORhh	21.7
PORlq	1.7
PORhq	2.9

## DIMENSIONER



Cb-1	144 mm
Cl-1	108 mm
G	111 mm
H	193 mm
H	193 mm
L	395 mm
L	395 mm
Mr	192 mm
O	9 mm

W 178 mm

W-1 178 mm

ØDi-1 1 "

ØDi-2 1 "

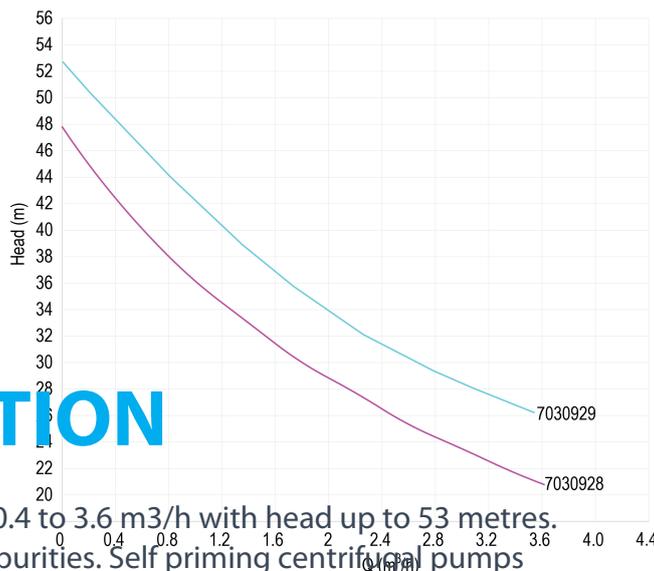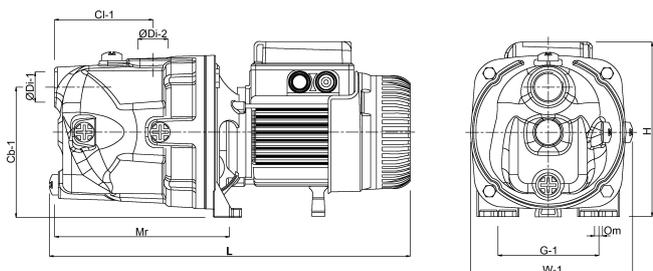

## PRODUKTINFORMATION

Installation: Horizontal, Fixed. Operating range: from 0.4 to 3.6 m<sup>3</sup>/h with head up to 53 metres.

Suitable for pumping water with low levels of sand impurities. Self priming centrifugal pumps with excellent suction capacity even when air bubbles are present.

**Genererad den: 08/05/2026**

Bevo Nordic A/S  
Pakhusgården 54  
5000 Odense C  
Danmark  
+45 66 19 25 45  
[info@bevo.dk](mailto:info@bevo.dk)  
<http://www.bevo.com>