

# DAB jet-pump rostfritt stål 304 1" invändig gänga 8bar 6,2A 230VAC grön självsugande med tryckkontroll type JETINOX 112 Control D (7030931)



# TEKNISKA SPECIFIKATIONER

Färg grön

Material rostfritt stål 304

Pump body rostfritt stål 304

Material impeller 1 teknopolymer A

Modell självsugande med tryckkontroll

Anslutning invändig gänga

Volt 230VAC

Max temperatur 35 °C

Minste mellantemperatur  
(kontinuerlig) 0 °C

Tryck 1 "

Max omgivningstemperatur 40 °C

Sug 1 "

Typ JETINOX 112 Control D

MWC 53,8 m

Storlek 1"

Effekt 0.75 kW

Ampere	6,2 A
--------	-------

Max flow rate	3.6 m <sup>3</sup> /h
---------------	-----------------------

BEP Capacity	2.4
--------------	-----

BEP Head	39.2
----------	------

PORlh	45.1
-------	------

PORhh	35.1
-------	------

PORlq	1.7
-------	-----

PORhq	2.9
-------	-----

## DIMENSIONER

Cb-1	102.5 mm
------	----------

Cb-1	144 mm
------	--------

Cl-1	122 mm
------	--------

Cr-1	89 mm
------	-------

Ct-1	102.5 mm
------	----------

G	111 mm
---	--------

H	197 mm
---	--------

H	197 mm
---	--------

L	424 mm
---	--------

L 440 mm

LM 409 mm



Mr 207 mm

O 9 mm

W-1 174 mm

ØDi-1 1 "

ØDi-2 1 "

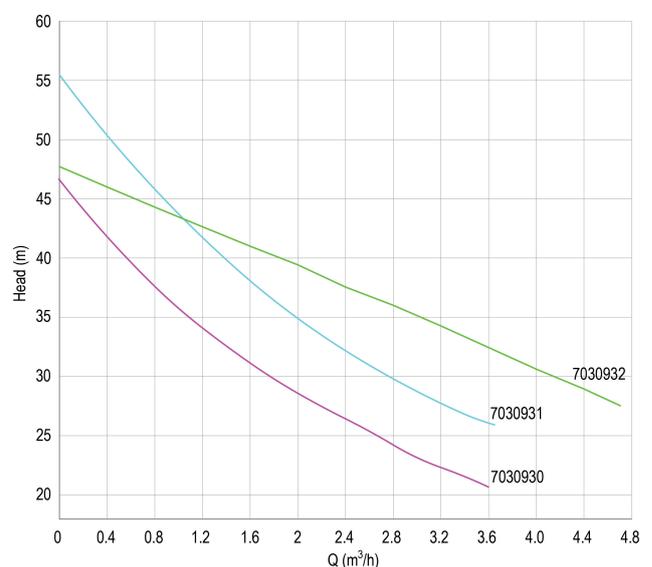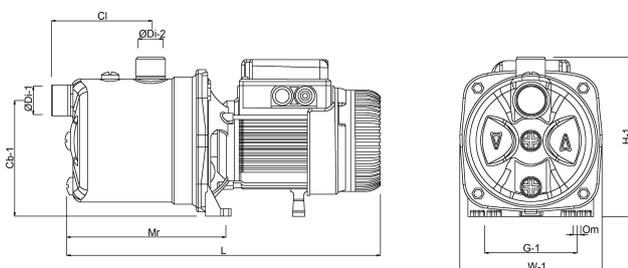

## PRODUKTINFORMATION

Installation: Horizontal, Fixed. Operating range: from 0.4 to 4.8 m<sup>3</sup>/h with head up to 53 metres. Suitable for pumping water with low levels of sand impurities. Self priming centrifugal pumps with excellent suction capacity even when air bubbles are present.

**Genererad den: 26/05/2026**

Bevo Nordic A/S  
Pakhusgården 54  
5000 Odense C  
Danmark  
+45 66 19 25 45  
[info@bevo.dk](mailto:info@bevo.dk)  
<http://www.bevo.com>