

DAB jet-pump rostfritt stål 304 1" invändig gänga 8bar 5,1A 230VAC grön självsugande med tryckkontroll type JETINOX 82 Control D (7030930)



DAB
MAKING WATER EASY

TEKNISKA SPECIFIKATIONER

Färg grön

Material rostfritt stål 304

Pump body rostfritt stål 304

Material impeller 1 teknopolymer A

Modell självsugande med tryckkontroll

Anslutning invändig gänga

Volt 230VAC

Max temperatur 35 °C

Minste mellantemperatur
(kontinuerlig) 0 °C

Tryck 1 "

Max omgivningstemperatur 40 °C

Sug 1 "

Typ JETINOX 82 Control D

MWC 47 m

Storlek 1"

Effekt 0.6 kW

Ampere	5,1 A
--------	-------

Max flow rate	3.6 m ³ /h
---------------	-----------------------

BEP Capacity	2.4
--------------	-----

BEP Head	26.3
----------	------

PORlh	30.9
-------	------

PORhh	23.7
-------	------

PORlq	1.7
-------	-----

PORhq	2.9
-------	-----

DIMENSIONER

Cb-1	270 mm
------	--------

Cb-1	144 mm
------	--------

Cl-1	122 mm
------	--------

Cr-1	167 mm
------	--------

Ct-1	239 mm
------	--------

G	111 mm
---	--------

H	197 mm
---	--------

H	197 mm
---	--------

L	406 mm
---	--------

L 406 mm

LM 390 mm

Mr 207 mm



MW 165 mm

O 9 mm

W-1 174 mm

ØDi-1 1 "

ØDi-2 1 "

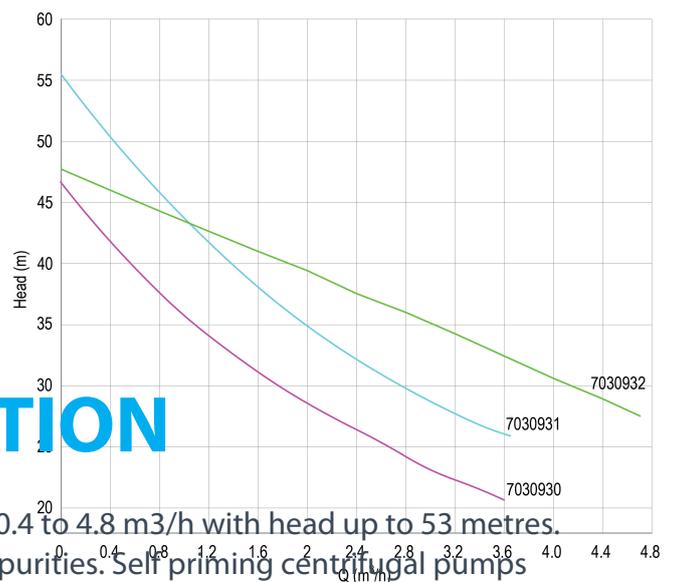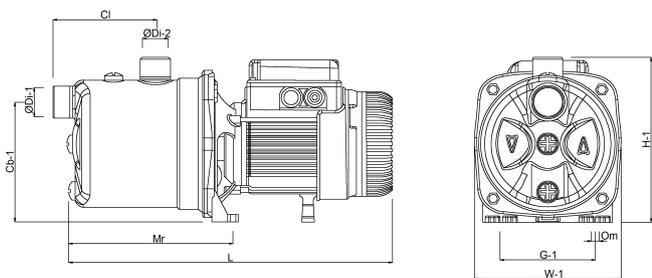

PRODUKTINFORMATION

Installation: Horizontal, Fixed. Operating range: from 0.4 to 4.8 m³/h with head up to 53 metres.

Suitable for pumping water with low levels of sand impurities. Self priming centrifugal pumps with excellent suction capacity even when air bubbles are present.

Genererad den: 08/05/2026

Bevo Nordic A/S
Pakhusgården 54
5000 Odense C

Danmark
+45 66 19 25 45
info@bevo.dk
<http://www.bevo.com>