

**NaanDan Mikrospridare plast
3/8WW utvändig gänga 2,3
mm 180° brun type Hadar
7110, 180° (0609057)**



NaanDan
by Rivulis

TEKNISKA SPECIFIKATIONER

Typ Hadar 7110, 180°

Material plast

Anslutning utvändig gänga

Sektorjusterbart intervall 180°

Rek. tryck 1.5 - 3.0 bar

Färg brun

Kapacitet 2 bar 265 l/h

Capacity 1bar 180 l/h

Kapacitet 1,5bar 227 l/h

Kapacitet 2,5bar 300 l/h


Kapacitet 3bar 333 l/h

Storlek 3/8WW

Munstycke storlek 2,3 mm

Radie 2bar 1,85 m

| 0609052 | | | 0609053 | | | 0609054 | | | 0609055 | | | 0609056 | | | 0609057 | | |
|---------|-----|------|---------|-----|------|---------|-----|------|---------|-----|------|---------|-----|------|---------|-----|------|
| 1,3mm | | | 1,4mm | | | 1,6mm | | | 1,8mm | | | 2,0mm | | | 2,3mm | | |
| Bar | lh | R | Bar | lh | R | Bar | lh | R | Bar | lh | R | Bar | lh | R | Bar | lh | R |
| 1,0 | 60 | 1,31 | 1,0 | 70 | 1,40 | 1,0 | 80 | 2,00 | 1,0 | 110 | 1,60 | 1,0 | 130 | 1,65 | 1,0 | 180 | 1,75 |
| 1,5 | 74 | 1,40 | 1,5 | 80 | 1,50 | 1,5 | 110 | 1,60 | 1,5 | 140 | 1,65 | 1,5 | 171 | 1,70 | 1,5 | 227 | 1,80 |
| 2,0 | 87 | 1,50 | 2,0 | 101 | 1,55 | 2,0 | 138 | 1,65 | 2,0 | 166 | 1,70 | 2,0 | 199 | 1,75 | 2,0 | 265 | 1,85 |
| 2,5 | 97 | 1,55 | 2,5 | 115 | 1,60 | 2,5 | 144 | 1,70 | 2,5 | 184 | 1,75 | 2,5 | 224 | 1,80 | 2,5 | 300 | 1,90 |
| 3,0 | 107 | 1,60 | 3,0 | 124 | 1,65 | 3,0 | 159 | 1,75 | 3,0 | 197 | 1,80 | 3,0 | 240 | 1,85 | 3,0 | 315 | 2,00 |

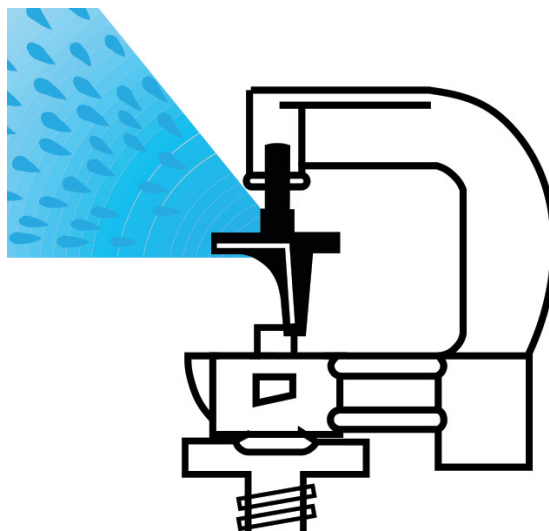

PRODUKTINFORMATION

Komplett med bajonettfatning.

Genererad den: 24/05/2026

Bevo Nordic A/S
 Pakhusgården 54
 5000 Odense C
 Danmark
 +45 66 19 25 45
info@bevo.dk
<http://www.bevo.com>